



THE ESSENTIALS

DEEP GROOVE
BALL BEARINGS

600 / 6000 / 6200 / 6300 SERIES

NTN® 

www.ntn-snr.com



With You

SNR IS A BRAND OF NTN CORPORATION
THROUGH ITS EUROPEAN SUBSIDIARY NTN-SNR

Strong of a 100 years of experience, SNR brand is famous worldwide for its leading position in Automotive market (wheel, clutch, gearbox, suspension). SNR production and quality levels are also particularly appreciated in Aerospace industry, typically in aircraft turbo-engines, helicopter gearboxes and blade roots.


NTN-SNR has used all its design and manufacturing know-how for the development of the SNR deep groove ball bearing range by implementing the most severe specifications and the strongest quality processes.



Headquartered in Osaka, Japan, NTN is a leading manufacturer of precision mechanical parts and components. Particularly in the world bearing market, NTN has the largest market share of hub bearings and the second largest of driveshafts. NTN products lead the world with a high level of quality and are chosen by many companies around the world.

EFFICIENCY IS A MUST,

**WE PROPOSE A COMPACT RANGE WITH JUST THE ESSENTIAL
OF DIMENSIONS AND OPTIONS,
BENEFITING FROM A PREMIUM BRAND QUALITY.**

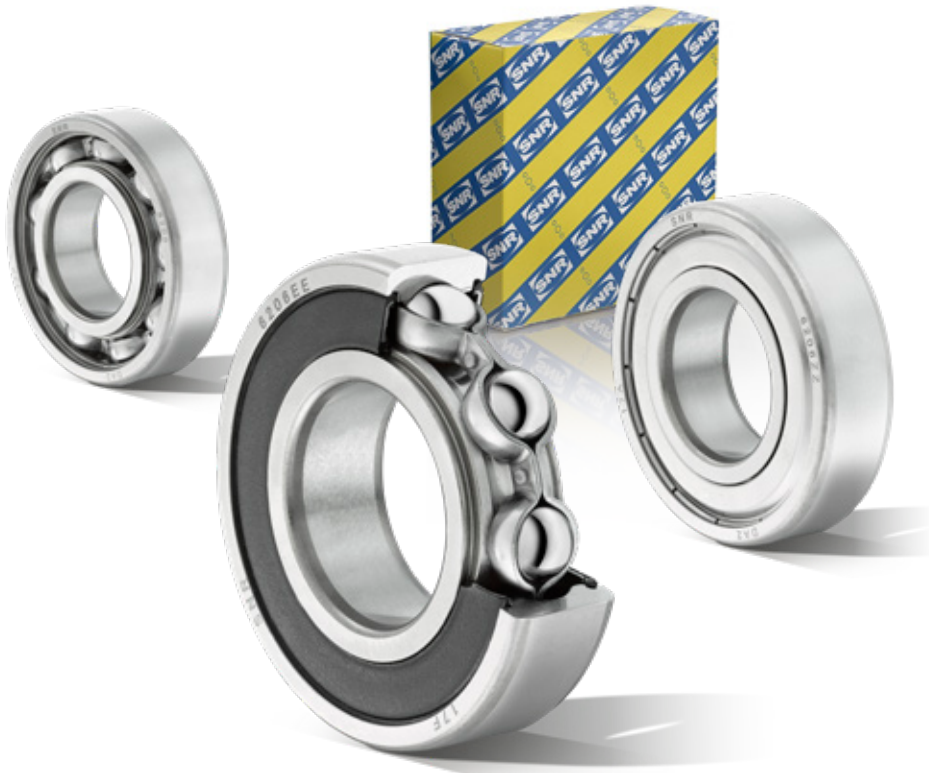

YOUR BENEFITS USING THIS RANGE

BOOST YOUR COMPETITIVENESS WITHOUT COMPROMISING TECHNICAL PERFORMANCE

Profit from high volume popular bearings designed with Premium specifications only.

INCREASE YOUR PURCHASING EFFICIENCY

No additional supplier in your panel requested. Your NTN sales engineer supplies both NTN and SNR brand offers.

MAKE YOUR LOGISTICS AND QUALITY PROCESS SMOOTH

Continue business as usual with NTN.

SNR TECHNICAL KEY POINTS



INTERNAL DESIGN ⁽¹⁾

Internal design is optimized to get outstanding results and an extended service life, maximising speed limit with low temperature rising.

CAGE ⁽²⁾

SNR deep groove ball bearings are steel cage products.

GREASE

Sealed versions are already greased, maximum working temperature being +120°C.

SEALING ⁽³⁾

EE version offers the best compromise between proofing performance and low torque by optimized seal and groove designs.

STEEL ⁽⁴⁾

SNR deep groove ball bearings use high quality steel, specified and controlled by NTN-SNR.

SNR OFFER DETAILS


AVAILABLE DIMENSIONAL RANGE:

607 to 609 ; 623 to 629 ; 6001 to 6007 ;
6200 to 6206 ; 6300 to 6305


NORMAL & C3 RADIAL INTERNAL CLEARANCE

3 SEALING OPTIONS:


Open, EE and ZZ




OPEN



DOUBLE
CONTACT
SEAL
(EE suffix)



DOUBLE
SHIELD
(ZZ suffix)




600 SERIES

FROM 607 TO 626


SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
607	7.000	19.000	6.000	0.007	CN	2.410	0.970	35000	64000	-40°C to +120°C
607EE	7.000	19.000	6.000	0.007	CN	2.310	0.900	-	31000	-20°C to +120°C
607EEC3	7.000	19.000	6.000	0.007	C3	2.310	0.900	-	31000	-20°C to +120°C
607ZZ	7.000	19.000	6.000	0.070	CN	2.310	0.900	35000	51000	-20°C to +120°C
607ZZC3	7.000	19.000	6.000	0.007	C3	2.310	0.900	35000	51000	-20°C to +120°C
608	8.000	22.000	7.000	0.012	CN	3.150	1.370	32000	57000	-40°C to +120°C
608EE	8.000	22.000	7.000	0.012	CN	3.150	1.370	-	26000	-20°C to +120°C
608EEC3	8.000	22.000	7.000	0.012	C3	3.150	1.370	-	26000	-20°C to +120°C
608ZZ	8.000	22.000	7.000	0.012	CN	3.150	1.370	32000	46000	-20°C to +120°C
608ZZC3	8.000	22.000	7.000	0.012	C3	3.150	1.370	32000	46000	-20°C to +120°C
609	9.000	24.000	7.000	0.014	CN	3.200	1.410	28000	56000	-40°C to +120°C
609EE	9.000	24.000	7.000	0.014	CN	3.200	1.410	-	23000	-20°C to +120°C
609EEC3	9.000	24.000	7.000	0.014	C3	3.200	1.410	-	23000	-20°C to +120°C
609ZZ	9.000	24.000	7.000	0.014	CN	3.200	1.410	28000	45000	-20°C to +120°C
609ZZC3	9.000	24.000	7.000	0.014	C3	3.200	1.410	28000	45000	-20°C to +120°C
623EE	3.000	10.000	4.000	0.002	CN	0.460	0.130	-	62000	-20°C to +120°C
623EEC3	3.000	10.000	4.000	0.002	C3	0.460	0.130	-	62000	-20°C to +120°C
623ZZ	3.000	10.000	4.000	0.002	CN	0.460	0.130	57000	81000	-20°C to +120°C
623ZZC3	3.000	10.000	4.000	0.002	C3	0.560	0.150	57000	81000	-20°C to +120°C
624EE	4.000	13.000	5.000	0.003	CN	1.230	0.470	-	49000	-20°C to +120°C
624EEC3	4.000	13.000	5.000	0.003	C3	1.230	0.470	-	49000	-20°C to +120°C
624ZZ	4.000	13.000	5.000	0.003	CN	1.190	0.420	47000	63000	-20°C to +120°C
624ZZC3	4.000	13.000	5.000	0.003	C3	1.230	0.470	47000	63000	-20°C to +120°C
625EE	5.000	16.000	5.000	0.005	CN	1.690	0.670	-	38000	-20°C to +120°C
625EEC3	5.000	16.000	5.000	0.005	C3	1.690	0.670	-	38000	-20°C to +120°C
625ZZ	5.000	16.000	5.000	0.005	CN	1.690	0.670	36000	54000	-20°C to +120°C
625ZZC3	5.000	16.000	5.000	0.005	C3	1.690	0.670	36000	54000	-20°C to +120°C
626EE	6.000	19.000	6.000	0.008	CN	2.410	0.970	-	30000	-20°C to +120°C
626EEC3	6.000	19.000	6.000	0.008	C3	2.310	0.900	-	31000	-20°C to +120°C
626ZZ	6.000	19.000	6.000	0.008	CN	2.410	0.970	33000	46000	-20°C to +120°C
626ZZC3	6.000	19.000	6.000	0.008	C3	2.410	0.970	33000	46000	-20°C to +120°C

600 SERIES

FROM 627 TO 629



SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
627EE	7.000	22.000	7.000	0.013	CN	3.150	1.370	-	27000	-20°C to +120°C
627EEC3	7.000	22.000	7.000	0.013	C3	3.250	1.370	-	26000	-20°C to +120°C
627ZZ	7.000	22.000	7.000	0.013	CN	3.250	1.370	30000	41000	-20°C to +120°C
627ZZC3	7.000	22.000	7.000	0.013	C3	3.250	1.370	30000	41000	-20°C to +120°C
629EE	9.000	26.000	8.000	0.019	CN	4.450	1.970	-	21000	-20°C to +120°C
629EEC3	9.000	26.000	8.000	0.019	C3	4.550	1.970	-	20000	-20°C to +120°C
629ZZ	9.000	26.000	8.000	0.019	CN	4.450	1.970	26000	37000	-20°C to +120°C
629ZZC3	9.000	26.000	8.000	0.019	C3	4.550	1.970	26000	37000	-20°C to +120°C




6000 SERIES

FROM 6000 TO 6005


SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
6000	10.000	26.000	8.000	0.018	CN	4.450	1.970	28000	51000	-40°C to +120°C
6000EE	10.000	26.000	8.000	0.020	CN	4.500	1.970	-	20000	-20°C to +120°C
6000EEC3	10.000	26.000	8.000	0.018	C3	4.450	1.970	-	21000	-20°C to +120°C
6000ZZ	10.000	26.000	8.000	0.018	CN	4.450	1.970	28000	41000	-20°C to +120°C
6000ZC3	10.000	26.000	8.000	0.020	C3	4.500	1.970	28000	41000	-20°C to +120°C
6001	12.000	28.000	8.000	0.020	CN	5.100	2.390	24000	45000	-40°C to +120°C
6001C3	12.000	28.000	8.000	0.020	C3	5.100	2.390	24000	45000	-40°C to +120°C
6001EE	12.000	28.000	8.000	0.021	CN	5.100	2.390	-	18000	-20°C to +120°C
6001EEC3	12.000	28.000	8.000	0.021	C3	5.100	2.390	-	18000	-20°C to +120°C
6001ZZ	12.000	28.000	8.000	0.021	CN	5.100	2.390	24000	36000	-20°C to +120°C
6001ZC3	12.000	28.000	8.000	0.021	C3	5.100	2.390	24000	36000	-20°C to +120°C
6002	15.000	32.000	9.000	0.028	CN	5.500	2.850	22000	39000	-40°C to +120°C
6002C3	15.000	32.000	9.000	0.028	C3	5.500	2.850	22000	39000	-40°C to +120°C
6002EE	15.000	32.000	9.000	0.029	CN	5.500	2.850	-	15000	-20°C to +120°C
6002EEC3	15.000	32.000	9.000	0.029	C3	5.500	2.850	-	15000	-20°C to +120°C
6002ZZ	15.000	32.000	9.000	0.029	CN	5.500	2.850	22000	31000	-20°C to +120°C
6002ZC3	15.000	32.000	9.000	0.029	C3	5.500	2.850	22000	31000	-20°C to +120°C
6003	17.000	35.000	10.000	0.035	CN	6.000	3.250	20000	35000	-40°C to +120°C
6003C3	17.000	35.000	10.000	0.035	C3	6.000	3.250	20000	35000	-40°C to +120°C
6003EE	17.000	35.000	10.000	0.037	CN	6.000	3.250	-	13000	-20°C to +120°C
6003EEC3	17.000	35.000	10.000	0.037	C3	6.000	3.250	-	13000	-20°C to +120°C
6003ZZ	17.000	35.000	10.000	0.037	CN	6.000	3.250	20000	28000	-20°C to +120°C
6003ZC3	17.000	35.000	10.000	0.037	C3	6.000	3.250	20000	28000	-20°C to +120°C
6004	20.000	42.000	12.000	0.066	CN	9.200	5.100	18000	29000	-40°C to +120°C
6004C3	20.000	42.000	12.000	0.066	C3	9.200	5.100	18000	29000	-40°C to +120°C
6004EE	20.000	42.000	12.000	0.068	CN	9.200	5.100	-	11000	-20°C to +120°C
6004EEC3	20.000	42.000	12.000	0.068	C3	9.200	5.100	-	11000	-20°C to +120°C
6004ZZ	20.000	42.000	12.000	0.068	CN	9.200	5.100	18000	23000	-20°C to +120°C
6004ZC3	20.000	42.000	12.000	0.068	C3	9.200	5.100	18000	23000	-20°C to +120°C
6005	25.000	47.000	12.000	0.079	CN	9.800	5.900	15000	25000	-40°C to +120°C
6005C3	25.000	47.000	12.000	0.079	C3	9.800	5.900	15000	25000	-40°C to +120°C
6005EE	25.000	47.000	12.000	0.083	CN	9.800	5.900	-	9500	-20°C to +120°C
6005EEC3	25.000	47.000	12.000	0.083	C3	9.800	5.900	-	9500	-20°C to +120°C
6005ZZ	25.000	47.000	12.000	0.083	CN	9.800	5.900	15000	20000	-20°C to +120°C
6005ZC3	25.000	47.000	12.000	0.083	C3	9.800	5.900	15000	20000	-20°C to +120°C

6000 SERIES

FROM 6006 TO 6007



SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
6006	30.000	55.000	13.000	0.111	CN	13.000	8.300	13000	21000	-40°C to +120°C
6006C3	30.000	55.000	13.000	0.111	C3	13.000	8.300	13000	21000	-40°C to +120°C
6006EE	30.000	55.000	13.000	0.116	CN	13.000	8.300	-	8000	-20°C to +120°C
6006EEC3	30.000	55.000	13.000	0.116	C3	13.000	8.300	-	8000	-20°C to +120°C
6006ZZ	30.000	55.000	13.000	0.116	CN	13.000	8.300	13000	17000	-20°C to +120°C
6006ZZC3	30.000	55.000	13.000	0.116	C3	13.000	8.300	13000	17000	-20°C to +120°C
6007	35.000	62.000	14.000	0.146	CN	15.500	10.300	12000	19000	-40°C to +120°C
6007C3	35.000	62.000	14.000	0.146	C3	15.500	10.300	12000	19000	-40°C to +120°C
6007EE	35.000	62.000	14.000	0.152	CN	15.500	10.300	-	6900	-20°C to +120°C
6007EEC3	35.000	62.000	14.000	0.152	C3	15.500	10.300	-	6900	-20°C to +120°C
6007ZZ	35.000	62.000	14.000	0.152	CN	15.500	10.300	12000	15000	-20°C to +120°C
6007ZZC3	35.000	62.000	14.000	0.152	C3	15.500	10.300	12000	15000	-20°C to +120°C




6200 SERIES

FROM 6200 TO 6204


SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
6200	10.000	30.000	9.000	0.030	CN	5.900	2.650	23000	42000	-40°C to +120°C
6200C3	10.000	30.000	9.000	0.030	C3	5.900	2.650	23000	42000	-40°C to +120°C
6200EE	10.000	30.000	9.000	0.031	CN	5.900	2.650	-	19000	-20°C to +120°C
6200EEC3	10.000	30.000	9.000	0.031	C3	5.900	2.650	-	19000	-20°C to +120°C
6200ZZ	10.000	30.000	9.000	0.031	CN	5.900	2.650	23000	34000	-20°C to +120°C
6200ZZC3	10.000	30.000	9.000	0.031	C3	5.900	2.650	23000	34000	-20°C to +120°C
6201	12.000	32.000	10.000	0.037	CN	6.800	3.050	22000	38000	-40°C to +120°C
6201C3	12.000	32.000	10.000	0.037	C3	6.800	3.050	22000	38000	-40°C to +120°C
6201EE	12.000	32.000	10.000	0.038	CN	6.800	3.050	-	17000	-20°C to +120°C
6201EEC3	12.000	32.000	10.000	0.038	C3	6.800	3.050	-	17000	-20°C to +120°C
6201ZZ	12.000	32.000	10.000	0.038	CN	6.800	3.050	22000	30000	-20°C to +120°C
6201ZZC3	12.000	32.000	10.000	0.038	C3	6.800	3.050	22000	30000	-20°C to +120°C
6202	15.000	35.000	11.000	0.043	CN	7.600	3.600	20000	34000	-40°C to +120°C
6202C3	15.000	35.000	11.000	0.043	C3	7.600	3.600	20000	34000	-40°C to +120°C
6202EE	15.000	35.000	11.000	0.045	CN	7.600	3.600	-	15000	-20°C to +120°C
6202EEC3	15.000	35.000	11.000	0.045	C3	7.600	3.600	-	15000	-20°C to +120°C
6202ZZ	15.000	35.000	11.000	0.045	CN	7.600	3.600	20000	27000	-20°C to +120°C
6202ZZC3	15.000	35.000	11.000	0.045	C3	7.600	3.600	20000	27000	-20°C to +120°C
6203	17.000	40.000	12.000	0.065	CN	9.400	4.800	18000	29000	-40°C to +120°C
6203C3	17.000	40.000	12.000	0.065	C3	9.400	4.800	18000	29000	-40°C to +120°C
6203EE	17.000	40.000	12.000	0.067	CN	9.400	4.800	-	13000	-20°C to +120°C
6203EEC3	17.000	40.000	12.000	0.067	C3	9.400	4.800	-	13000	-20°C to +120°C
6203ZZ	17.000	40.000	12.000	0.067	CN	9.400	4.800	18000	23000	-20°C to +120°C
6203ZZC3	17.000	40.000	12.000	0.067	C3	9.400	4.800	18000	23000	-20°C to +120°C
6204	20.000	47.000	14.000	0.096	CN	13.700	6.700	16000	25000	-40°C to +120°C
6204C3	20.000	47.000	14.000	0.096	C3	13.700	6.700	16000	25000	-40°C to +120°C
6204EE	20.000	47.000	14.000	0.100	CN	13.700	6.700	-	11000	-20°C to +120°C
6204EEC3	20.000	47.000	14.000	0.100	C3	13.700	6.700	-	11000	-20°C to +120°C
6204ZZ	20.000	47.000	14.000	0.100	CN	13.700	6.700	16000	20000	-20°C to +120°C
6204ZZC3	20.000	47.000	14.000	0.100	C3	13.700	6.700	16000	20000	-20°C to +120°C

6200 SERIES

FROM 6205 TO 6206




SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
6205	25.000	52.000	15.000	0.125	CN	13.800	7.900	14000	22000	-40°C to +120°C
6205C3	25.000	52.000	15.000	0.125	C3	13.800	7.900	14000	22000	-40°C to +120°C
6205EE	25.000	52.000	15.000	0.129	CN	13.800	7.900	-	9100	-20°C to +120°C
6205EEC3	25.000	52.000	15.000	0.129	C3	13.800	7.900	-	9100	-20°C to +120°C
6205ZZ	25.000	52.000	15.000	0.129	CN	13.800	7.900	14000	17000	-20°C to +120°C
6205ZZC3	25.000	52.000	15.000	0.129	C3	13.800	7.900	14000	17000	-20°C to +120°C
6206	30.000	62.000	16.000	0.194	CN	19.200	11.300	12000	18000	-40°C to +120°C
6206C3	30.000	62.000	16.000	0.194	C3	19.200	11.300	12000	18000	-40°C to +120°C
6206EE	30.000	62.000	16.000	0.202	CN	19.200	11.300	-	7500	-20°C to +120°C
6206EEC3	30.000	62.000	16.000	0.202	C3	19.200	11.300	-	7500	-20°C to +120°C
6206ZZ	30.000	62.000	16.000	0.199	CN	19.200	11.300	12000	14000	-20°C to +120°C
6206ZZC3	30.000	62.000	16.000	0.199	C3	19.200	11.300	12000	14000	-20°C to +120°C



6300 SERIES

FROM 6300 TO 6305

SNR Part Number	SNR BRAND									
	Bore diameter (d in mm)	Outer diameter (D in mm)	Width (B in mm)	Weight (kg)	Radial internal clearance class	Dynamic load (kN)	Static load (kN)	Thermal reference speed (rpm)	Limiting speed (rpm)	Admissible temperature range
6300	10.000	35.000	11.000	0.053	CN	7.600	3.450	21000	36000	-40°C to +120°C
6300C3	10.000	35.000	11.000	0.053	C3	7.600	3.450	21000	36000	-40°C to +120°C
6300EE	10.000	35.000	11.000	0.055	CN	7.600	3.450	-	16000	-20°C to +120°C
6300EEC3	10.000	35.000	11.000	0.055	C3	7.600	3.450	-	16000	-20°C to +120°C
6300ZZ	10.000	35.000	11.000	0.055	CN	7.600	3.450	21000	29000	-20°C to +120°C
6300ZZC3	10.000	35.000	11.000	0.055	C3	7.600	3.450	21000	29000	-20°C to +120°C
6301	12.000	37.000	12.000	0.058	CN	9.700	4.200	20000	34000	-40°C to +120°C
6301C3	12.000	37.000	12.000	0.058	C3	9.700	4.200	20000	34000	-40°C to +120°C
6301EE	12.000	37.000	12.000	0.060	CN	9.700	4.200	-	15000	-20°C to +120°C
6301EEC3	12.000	37.000	12.000	0.060	C3	9.700	4.200	-	15000	-20°C to +120°C
6301ZZ	12.000	37.000	12.000	0.060	CN	9.700	4.200	20000	28000	-20°C to +120°C
6301ZZC3	12.000	37.000	12.000	0.060	C3	9.700	4.200	20000	28000	-20°C to +120°C
6302	15.000	42.000	13.000	0.080	CN	11.300	5.400	17000	29000	-40°C to +120°C
6302C3	15.000	42.000	13.000	0.080	C3	11.300	5.400	17000	29000	-40°C to +120°C
6302EE	15.000	42.000	13.000	0.084	CN	11.300	5.400	-	13000	-20°C to +120°C
6302EEC3	15.000	42.000	13.000	0.084	C3	11.300	5.400	-	13000	-20°C to +120°C
6302ZZ	15.000	42.000	13.000	0.084	CN	11.300	5.400	17000	23000	-20°C to +120°C
6302ZZC3	15.000	42.000	13.000	0.084	C3	11.300	5.400	17000	23000	-20°C to +120°C
6303	17.000	47.000	14.000	0.112	CN	13.500	6.600	16000	26000	-40°C to +120°C
6303C3	17.000	47.000	14.000	0.112	C3	13.500	6.600	16000	26000	-40°C to +120°C
6303EE	17.000	47.000	14.000	0.116	CN	13.500	6.600	-	12000	-20°C to +120°C
6303EEC3	17.000	47.000	14.000	0.116	C3	13.500	6.600	-	12000	-20°C to +120°C
6303ZZ	17.000	47.000	14.000	0.116	CN	13.500	6.600	16000	21000	-20°C to +120°C
6303ZZC3	17.000	47.000	14.000	0.116	C3	13.500	6.600	16000	21000	-20°C to +120°C
6304	20.000	52.000	15.000	0.141	CN	15.800	7.900	14000	24000	-40°C to +120°C
6304C3	20.000	52.000	15.000	0.141	C3	15.800	7.900	14000	24000	-40°C to +120°C
6304EE	20.000	52.000	15.000	0.146	CN	15.800	7.900	-	11000	-20°C to +120°C
6304EEC3	20.000	52.000	15.000	0.146	C3	15.800	7.900	-	11000	-20°C to +120°C
6304ZZ	20.000	52.000	15.000	0.146	CN	15.800	7.900	14000	19000	-20°C to +120°C
6304ZZC3	20.000	52.000	15.000	0.146	C3	15.800	7.900	14000	19000	-20°C to +120°C
6305	25.000	62.000	17.000	0.228	CN	22.200	11.500	12000	19000	-40°C to +120°C
6305C3	25.000	62.000	17.000	0.228	C3	22.200	11.500	12000	19000	-40°C to +120°C
6305EE	25.000	62.000	17.000	0.235	CN	22.200	11.500	-	8600	-20°C to +120°C
6305EEC3	25.000	62.000	17.000	0.235	C3	22.200	11.500	-	8600	-20°C to +120°C
6305ZZ	25.000	62.000	17.000	0.235	CN	22.200	11.500	12000	15000	-20°C to +120°C
6305ZZC3	25.000	62.000	17.000	0.235	C3	22.200	11.500	12000	15000	-20°C to +120°C



DEEP GROOVE BALL BEARINGS **THE ESSENTIALS**

600 / 6000 / 6200 / 6300 SERIES



This document is the exclusive property of NTN-SNR ROULEMENTS. Any total or partial reproduction hereof without the prior consent of NTN-SNR ROULEMENTS is strictly prohibited. Legal action may be brought against anyone breaching the terms of this paragraph.

NTN-SNR ROULEMENTS shall not be held liable for any errors or omissions that may have crept into this document despite the care taken in drafting it. Due to our policy of continuous research and development, we reserve the right to make changes without notice to all or part of the products and specifications mentioned in this document.

© NTN-SNR ROULEMENTS, international copyright 2019.

